

## General Purpose Series Compact Fluorescent with Cover

for Replacing General Purpose Incandescent Light Bulbs



New

- Wide variety of lamp designs to satisfy most incandescent light bulb's applications
- 8,000 hours average rated lamp life
- Instant flicker-free starting
- 82 CRI Color Rendering Index
- Multiple Color Temperature choices:  
 Warm White: 2700K-3000K  
 Cool White: 3500K-4100K  
 Daylight: 5000K-6500K



Landlite General Purpose Compact Fluorescent Lamp collections are North America's most comprehensive CFLs designed with very competitive pricing for direct replacements of various categories of incandescent lamps in almost all general purpose lighting applications.

### Application Information

#### Applications

- Ceiling Fixtures
- Table Lamps
- Sconces and Pendants
- Task and Showcase Lighting
- Enclosed Outdoor Fixtures
- Difficult to Service Areas

#### Application Notes

1. Use only on 120V AC/60Hz circuit
2. Meets Energy Star, UL, CSA, and FCC requirements
3. Rated data and best lamp performance achieved when operated at 25°C/77°F
4. Cannot be installed on dimming circuits, in emergency exit fixtures or lights, and on electronic timers or photocells
5. In outdoor applications, use only in totally-enclosed fixtures to avoid exposure to weather

### Energy Saving Substitution Guide

Landlite CFLs	CFL Watts	Incandescent Bulb to Replace	Watts Saved	Energy* Savings
<b>Capsule Lamps</b>				
8,000-Hour Lamps	7W	25W Candle	18W	\$13
8,000-Hour Lamps	7W	25W Soft White A19	18W	\$13
8,000-Hour Lamps	9W	40W Soft White A19, G20	31W	\$28
8,000-Hour Lamps	9W	40W G25 Incandescent	31W	\$28
8,000-Hour Lamps	11W	50W A19 Incandescent	39W	\$35

\*Total Energy Cost Savings, based on operating one CFL over its lifetime at \$0.10 per KWH.


### Specifications

Ordering Code	Lamp Watts	Lamp Base	Avg Initial Lumens	CRI	Avg Rated Life (hrs)
EIC-7W	7W	E12	300 lm	82	8,000 hrs
ELG-7W	7W	Med., E26	350 lm	82	8,000 hrs
ELG-9W G20	9W	Med., E26	450 lm	82	8,000 hrs
ELG-9W G25	9W	Med., E26/E12	450 lm	82	8,000 hrs
EI-11W A19	11W	Med., E26	600 lm	82	8,000 hrs

### Physical Data & Packaging Information

Ordering Code	Max Overall Length	Reflector Diameter	Qty / Carton	Dimensions / Carton (cm)	G.W. / Carton
EIC-7W	4.06"/103mm	1.54"/39mm	100 pcs	45x23x27 cm	7 Kg
ELG-7W	3.39"/86mm	2.01"/51mm	100 pcs	57x29x23 cm	8 Kg
ELG-9W G20	4.37"/111mm	2.76"/70mm	50 pcs	39x39x26 cm	6.5 Kg
ELG-9W G25	4.69"/119mm	3.35"/85mm	50 pcs	47x47x27 cm	9.5 Kg
EI-11W A19	4.29"/109mm	2.20"/56mm	50 pcs	36x36x23 cm	6.0Kg

### Technical Information

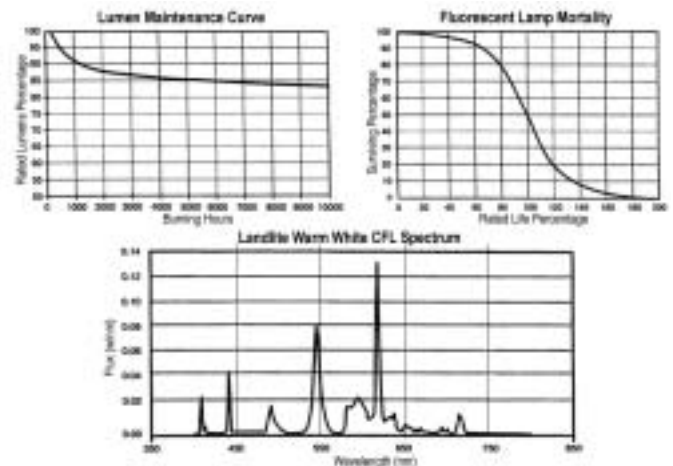

CE Lighting